

# AC-DC 60-65W


## 3A-602DAxx

### Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,FCC standard
- Meet EPS 2.0 LEVEL V



### Dimension:

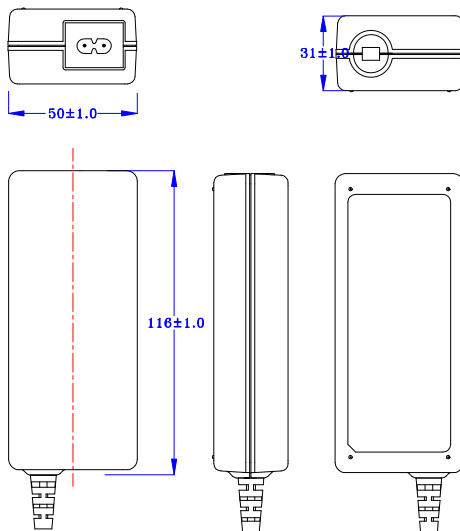

| Model No.  | Output |       | Additional Safety |
|------------|--------|-------|-------------------|
|            | V      | A     |                   |
| 3A-602DA12 | 12V    | 5A    |                   |
| 3A-602DA19 | 19V    | 3.42A |                   |
| 3A-602DA24 | 24V    | 2.7A  |                   |
| 3A-602DA48 | 48V    | 1.25A |                   |

### Specification:

|             |   |  |
|-------------|---|--|
| Input       | Voltage   | AC 90V~264V Universal full range         |
|             | Frequency   | 47-63Hz                                  |
|             | Current   | 1.5A                                     |
|             | Leakage Current                                       | < 0.25mA                                 |
| Others      | Start up time   | < 2000mS @ Minimum AC input              |
|             | Rise time   | < 30mS                                   |
|             | Hold up time  | > 20mS @ 230Vac/50Hz input               |
|             | Cooling   | Natural Cooling                          |
| Environment | Temperature   | Operating: 0~40°C;Storage: -10~+75°C     |
|             | Humidity  | Operating: 20%~85%;Storage: 10%~95%      |
| M.T.B.F     | 50k Hours   |  |
| Safety      | UL 60950-1/CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1 |  |
| EMC         | EMI   | FCC CFR 47 PART 15 , EN55022 , EN61000-3 |
|             | EMS   | EN55024(EN61204-3) EN61000-4             |